

SERIES GL-QR STANDARD COVERAGE, QUICK RESPONSE UPRIGHT, PENDENT & RECESSED PENDENT SPRINKLERS

K-FACTOR: 2.8, 4.2, 5.6, 8.0

GENERAL DESCRIPTION

Globe Series GL-QR sprinklers are Listed Quick Response sprinklers which utilize a 3mm frangible glass bulb as the thermosensitive operating element. These sprinklers are available in upright, pendent, and recessed pendent orientations. They are Listed and Approved as Standard Coverage sprinklers and are to be installed in accordance with the guidelines of the appropriate Installation Standard being mandated by the AHJ (i.e. NFPA 13; FM 2-0). These sprinklers are available in various K-factors, temperatures and finishes as shown. Recessed escutcheons with either 1/2" or 3/4" vertical adjustment are available (See Approvals Tables for appropriate sprinkler/escutcheon combinations and Listings). Some pendent models are additionally available with a special "Seismic" escutcheon to meet the IBC-ASCE/SEI 7 requirements for use in seismic design categories C, D & E.



UPRIGHT



PENDENT



RECESSED PENDENT



RECESSED PENDENT SEISMIC IBC/ASCE/SEI CODES

OPERATION

Upon exposure to heat such as from a fire, the fluid in the bulb expands, compressing the air bubble within the bulb. When the air bubble can no longer compress, the fluid expansion causes breakage of the glass bulb, resulting in release of the water seat assembly, and discharge of water from the sprinkler.

TECHNICAL DATA

SIN

- Upright: GL2815, GL4215, GL5615, GL8115, GL8118
- Pendent, Recessed Pendent: GL2801, GL4201, GL5601, GL8101, GL8106

Approvals

- cULus • FM • LPCB • CE
- See Approval Tables

Maximum Working Pressure

- 175 psi (12 bar)
- Factory tested to 500 psi (34 bar)

Minimum Operating Pressure

- 7 psi (48 kPa)

Temperature Rating

- See Approval Tables

Materials of Construction

- Frame - bronze • Deflector - brass • Screw - brass
- Lodgement Wire - stainless steel • Bulb seat - copper
- Spring - nickel alloy • Seal - teflon
- Bulb - glass with alcohol based solution, 3mm
- Escutcheon Assembly - carbon steel

FINISHES AND ACCESSORIES

Finishes

- Factory Bronze • Chrome • White Polyester
- Black Polyester - special order

Escutcheons

- Brass • Chrome • White Polyester • Black Polyester

Wrenches

- Standard • Recess • 1/2" NPT • 3/4" NPT

NOTE:

Corrosion resistant coatings, where applicable, are utilized to extend the life of copper alloy sprinklers beyond that which would otherwise be expected when exposed to corrosive atmospheres. Although corrosion resistant coated sprinklers have passed the standard corrosion tests of the applicable approval agencies, the testing is not representative of all possible corrosive atmospheres. Consequently, it is recommended that the end user be consulted with respect to the suitability of these coatings for any given corrosive environment. The effects of ambient temperature, concentration of chemicals, humidity, and gas/chemical velocity, should be considered, as a minimum, along with the corrosive nature of the chemical to which the sprinklers will be exposed.

NOTE:

Users should refer to Globe's web site (www.globesprinkler.com) to ensure that the most recent technical literature is being utilized.

INSTALLATION

NOTICE

Do not install any bulb-type sprinkler if the bulb is cracked or there is loss of liquid from the bulb. Sprinklers should be tightened enough to obtain a leak-tight joint when water pressure is applied and/or hydrostatic test is performed. Sprinklers should not be overtightened as this can result in distortion and subsequent leakage. It is recommended not to exceed 14 ft.-lb. (19.0 Nm) torque for 1/2 inch NPT sprinkler threads; 20 ft.-lb. (26.8 Nm) to 3/4 inch NPT threads.

- Step1.** Sprinklers must be properly oriented.
- Step2.** With pipe thread sealant applied to the pipe threads, hand tighten the sprinkler into the sprinkler fitting. *Note: Do not grasp the sprinkler by the deflector.*
- Step3.** Wrench-tighten the sprinkler using only the appropriate wrench. Wrenches are only to be applied to the sprinkler wrench flats or wrench hex as applicable. *Note: Do not apply wrench to frame arms.*



FIGURE 1: STANDARD SPRINKLER WRENCH

1/2" NPT P/N 325390

3/4" NPT P/N 312366



FIGURE 2: RECESSED SPRINKLER WRENCH

1/2" NPT P/N 325391

3/4" NPT P/N 325401

CARE AND MAINTENANCE

Prior to installation, it is important to read and follow the "Sprinkler Caution" sheet (GFS-840) included within each box of sprinklers. This sheet is available on Globe's web site (www.globesprinkler.com).

Store sprinklers in a cool, dry place. Exposure to extreme heat will damage the thermal sensing element, possibly resulting in premature activation. Avoid direct sunlight.

Replace any sprinkler that shows any corrosion, damage, or loss of liquid from the glass bulb.

Do not attempt to paint or alter the sprinkler's coating in any manner after leaving the manufacturing plant.

Do not attach wiring, ropes, decorations or fixtures to a sprinkler.

Absence of an escutcheon, used to cover a ceiling hole, may delay sprinkler operation in a fire situation.

It is the owner's responsibility for inspection, testing and maintenance of the fire sprinkler system with all components and devices in accordance with the National Fire Protection Association Pamphlet 25 as well as any other requirements as set forth by the local Authority Having Jurisdiction (AHJ).

TABLE A: UPRIGHT SPRINKLER APPROVALS

SIN	GL2815	GL4215 ⁽¹⁾	GL5615 ⁽¹⁾	GL8115 *	GL8118 ⁽¹⁾
ORIENTATION	UPRIGHT	UPRIGHT	UPRIGHT	UPRIGHT	UPRIGHT
K-FACTOR	2.8 (40 metric)	4.2 (60 metric)	5.6 (80 metric)	8.0 (115 metric)	8.0 (115 metric)
NPT	1/2" (15mm)	1/2" (15mm)	1/2" (15mm)	1/2" (15mm)	3/4" (20mm)
HAZARD	L.H.	L.H.	L.H./O.H.	L.H./O.H.	L.H./O.H.
cULus Listed	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)
FM Approved	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)
LPCB Ref. No. 147c/05	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)
CE	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)

* FOR RETROFIT USE ONLY

(1) cULus LISTED CORROSION RESISTANT WITH POLYESTER COATING.

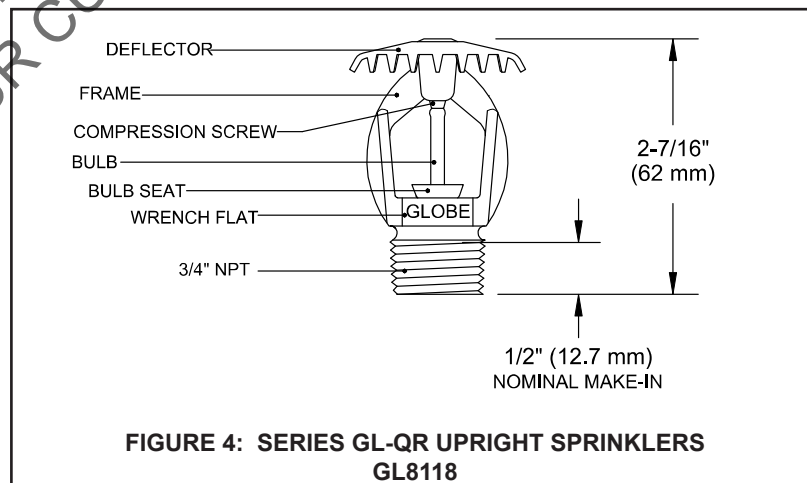
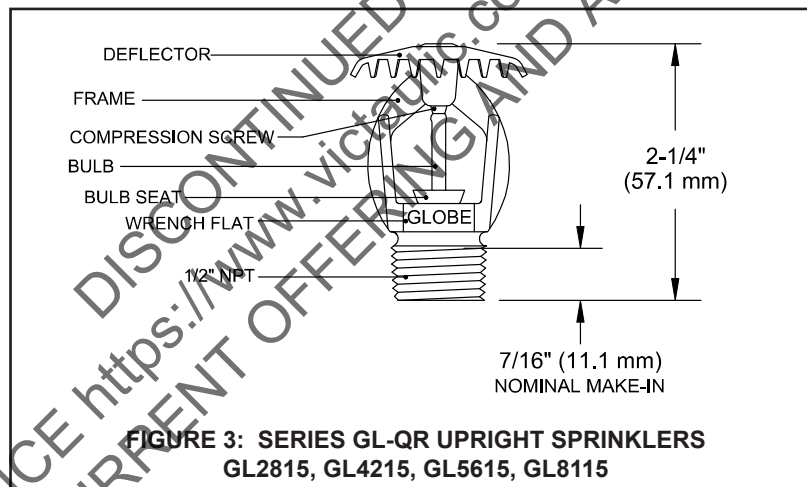


TABLE B: PENDENT SPRINKLER APPROVALS

SIN	GL2801	GL4201 ⁽¹⁾	GL5601 ⁽¹⁾	GL8101 *	GL8106 ⁽¹⁾
ORIENTATION	PENDENT	PENDENT	PENDENT	PENDENT	PENDENT
K-FACTOR	2.8 (40 metric)	4.2 (60 metric)	5.6 (80 metric)	8.0 (115 metric)	8.0 (115 metric)
NPT	1/2" (15mm)	1/2" (15mm)	1/2" (15mm)	1/2" (15mm)	3/4" (20mm)
HAZARD	L.H.	L.H.	L.H./O.H.	L.H./O.H.	L.H./O.H.
cULus Listed	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)
FM Approved	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)
LPCB Ref. No. 147c/05	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)
CE	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)

* FOR RETROFIT USE ONLY

(1) cULus LISTED CORROSION RESISTANT WITH POLYESTER COATING.

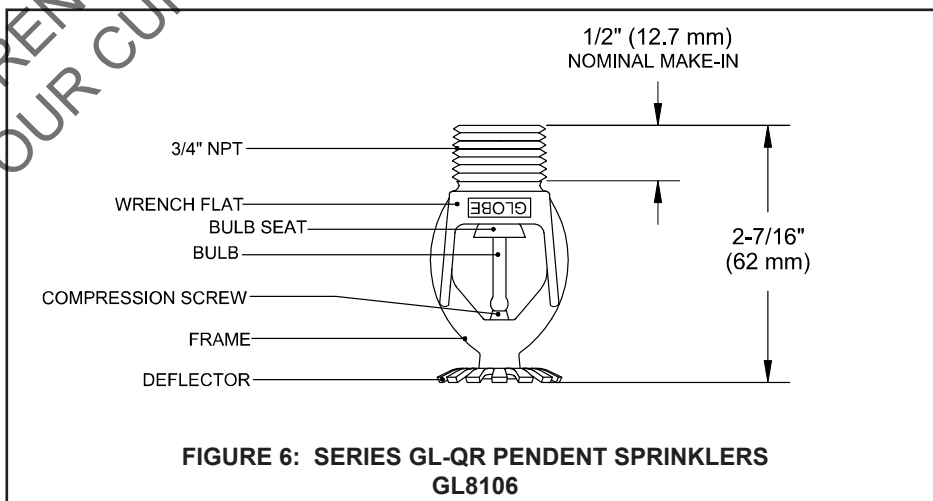
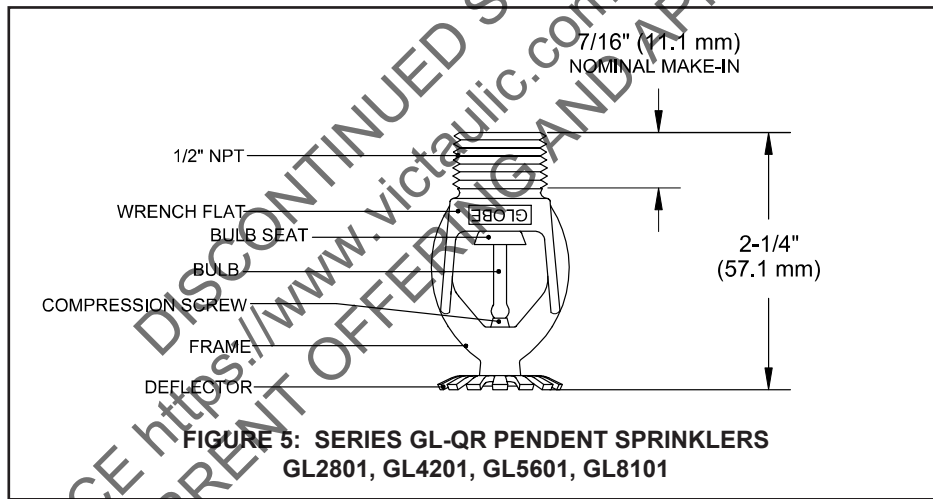


TABLE C: RECESSED PENDENT SPRINKLER APPROVALS

SIN	GL2801 (2)	GL4201 (1) (2)	GL5601 (1) (2)	GL8101 * (1) (2)	GL8106 (1) (2) (3)
ORIENTATION	RECESSED PEND.	RECESSED PEND.	RECESSED PEND.	RECESSED PEND.	RECESSED PEND.
K-FACTOR	2.8 (40 metric)	4.2 (60 metric)	5.6 (80 metric)	8.0 (115 metric)	8.0 (115 metric)
NPT	1/2"	1/2"	1/2"	1/2"	3/4"
HAZARD	L.H.	L.H.	L.H./O.H.	L.H./O.H.	L.H./O.H.
cULus Listed	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)
FM Approved Note: 1/2" Adjustable Recessed Escutcheon only	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C)
LPCB Ref. No. 147c/05	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C)
CE	NA	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C)	NA	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C)

* FOR RETROFIT USE ONLY

- (1) cULus LISTED CORROSION RESISTANT SPRINKLER WITH POLYESTER COATING
- (2) cULus / LPCB /CE APPROVED WITH 1/2" ADJUSTABLE AND 3/4" ADJUSTABLE RECESSED ESCUTCHEON
- (3) FM APPROVED FOR BRASS FINISH ONLY

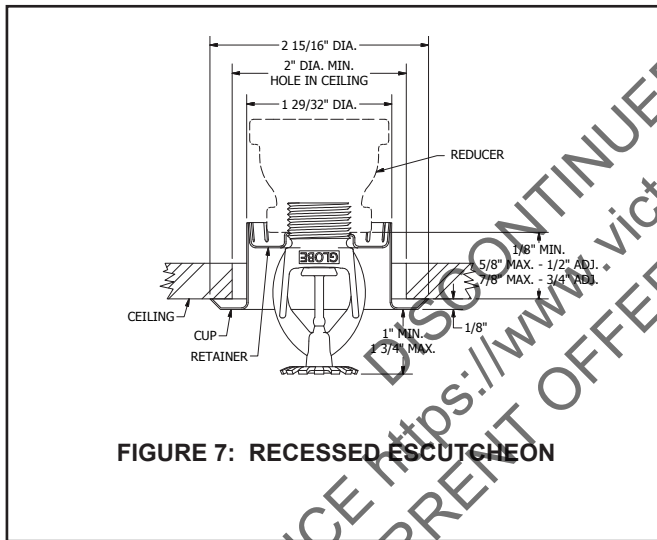


FIGURE 7: RECESSED ESCUTCHEON

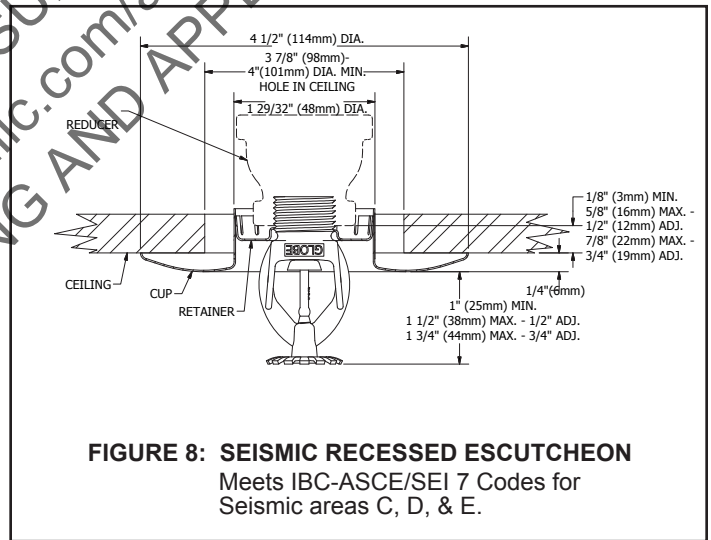


FIGURE 8: SEISMIC RECESSED ESCUTCHEON
Meets IBC-ASCE/SEI 7 Codes for Seismic areas C, D, & E.

TABLE D: STANDARD ESCUTCHEONS

3/4" ADJUSTABLE FRICTION FIT RECESSED ESCUTCHEON		
FINISH	1/2" NPT	3/4" NPT
Chrome	325422	325423
Brass	325424	325420
White Polyester	325426-W	325427-W
Black Polyester	325426-B	325427-B
Stainless Steel	326140	NA
1/2" ADJUSTABLE FRICTION FIT RECESSED ESCUTCHEON		
FINISH	1/2" NPT	3/4" NPT
Chrome	332071	326040
Brass	332072	326041
White Polyester	332073-W	326042-W
Black Polyester	332073-B	326042-B

TABLE E: SEISMIC ESCUTCHEONS

3/4" ADJUSTABLE FRICTION FIT RECESSED ESCUTCHEON (SEISMIC)		
FINISH	1/2" NPT	3/4" NPT
Chrome	326170	326177
White	326172-W	326178-W
1/2" ADJUSTABLE FRICTION FIT RECESSED ESCUTCHEON (SEISMIC)		
FINISH	1/2" NPT	3/4" NPT
Chrome	326201	326208
White	326203-W	326210-W

TABLE F: PART NUMBER SELECTION

PART NUMBER
SIN + TEMPERATURE + FINISH

XXXX XXX XX

SIN	
GL2815	2815
GL4215	4215
GL5615	5615
GL8115	8115
GL8118	8118
GL2801	2801
GL4201	4201
GL5601	5601
GL8101	8101
GL8106	8106

TEMPERATURE	
135	135°F (57°C)
155	155°F (68°C)
175	175°F (79°C)
200	200°F (93°C)
286	286°F (141°C)

FINISH	
01	BRONZE
02	CHROME
03	WHITE POLYESTER
04	BLACK POLYESTER

*Note: All combinations may not be available.
Refer to Listing/Approval Tables for available listed combinations.*

ORDERING INFORMATION

SPECIFY:

- SPRINKLER
 - Quantity • SIN • Orientation • Orifice • NPT • Temperature Rating • Finish • Part Number (See TABLE F)
- ESCUTCHEON
 - Quantity • Finish • Part Number (See TABLE D & TABLE E)
- WRENCH
 - Quantity • Part Number

1/2" NPT Standard	325390
3/4" NPT Standard	312366
1/2" NPT Recess	325391
3/4" NPT Recess	325401

GLOBE® PRODUCT WARRANTY

Globe agrees to repair or replace any of its manufactured products found to be defective in material or workmanship for a period of one year from date of shipment. For specific details of our warranty please refer to Price List Terms and Conditions of Sale (Our Price List).

DISCONTINUED SUBMITTALS: https://www.victaulic.com/assets/uploads/sprinklers FOR OUR CURRENT OFFERING AND APPLICABLE SUBMITTALS

